

### POTTING AND TACKING COMPOUND Multi-Cure® 955 Rev. A SERIES

#### DESCRIPTION

Multi-Cure® 955 Rev. A Series are high strength, structural adhesives that are used in a wide variety of applications. Tough, resilient bonds form upon exposure to UV light in applications such as coil terminating, unitizing commutator windings and tamperproofing adjustment screws. 955 Rev. A Series adhesives bond well to steel, aluminum and glass surfaces. Multi-Cure 955 Rev. A Series can be cured with UV light, heat, or pre-applied activator. Dymax adhesive-activator bonding systems comply with the Montreal Protocol and U.S. Clean Air Act of 1990.

#### TYPICAL UNCURED PROPERTIES (not specifications)

Solvent Content	None - 100% Reactive Solids		
Chemical Class	Urethane Acrylate		
Appearance	Clear/Straw Liquid		
Flash Point	>93°C (200°F)		
Solubility	Alcohols/Chlorinated Solvents/Ketones		
Toxicity	Low		
Viscosity (20 rpm)	955 Rev A	5,000 cP (nominal)	ASTM D-1084
	955-T Rev A	7,000 cP (nominal)	ASTM D-1084
	955-Gel Rev A	30,000 cP (nominal)	ASTM D-2556

#### TYPICAL CURED PROPERTIES (not specifications)

Durometer Hardness	D75	ASTM D-2240
Tensile at Break	3,325 psi (22.9 MPa)	ASTM D-638
Elongation at Break	28%	ASTM D-638
Modulus of Elasticity	210,000 psi (1450 MPa)	ASTM D-638
Tensile (Lap) Shear (steel to steel)	3,700 psi (25.5 MPa)	ASTM D-1002
Water Absorption (24 h)	5.0%	ASTM D-570
Boiling Water Absorption (2 h)	8.0%	ASTM D-570
Linear Shrinkage	2%	DSTM D-101
Coefficient of Linear Thermal Expansion	100 x 10 <sup>-6</sup> cm/cm/°C	ASTM D-696
Thermal Limit (brittle/degrades)	-55° to +150°C (-65°/+300°F)	DSTM D-200

\*DSTM refers to Dymax Standard Test Method


#### ELECTRICAL

Dielectric Strength	18.9 kV/mm	JISK-6911
Surface Resistivity	3 x 10 <sup>12</sup> Ω	JISK-6911

#### CURE DATA - Using 365 nanometer UV light:

	Cure Time (Seconds)	Intensity (mW/cm <sup>2</sup> )	Dymax Light-Welder® Lamps
Tack-free cure (1/8-inch bead)	10	175	5000-EC
Depth of cure (1/4 inch)	10	175	5000-EC
Fixture between glass slides	1-2	50	2000-EC

### **BOND STRENGTH DEVELOPMENT USING 501-E ACTIVATOR**

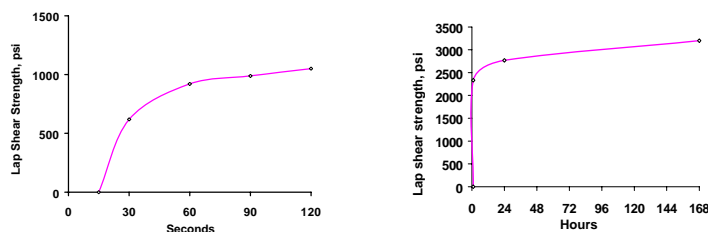

#### **Shadowed areas can be cured with activator or heat.**

Activator is placed on one surface and the adhesive on the mating surface. Curing takes place at room temperature when the parts are mated. Activator requires well-mated parts (up to 0.015-inch gap). Well-mated parts fixture (achieve handling strength) in less than a minute. See Dymax Technical Bulletin "Guidelines for Activator Curing" for complete instructions for all activators.

Heat may be used after UV cure to cure shadowed areas or after activator cure to accelerate cure. The following guidelines depend on the amount of adhesive:

<u>Minimum Adhesive Temperature</u>	<u>Time</u>
110°C (225°F)	60 Minutes
120°C (250°F)	30 Minutes
150°C (300°F)	15 Minutes

### **DISPENSING AND HANDLING ADHESIVE**

Multi-Cure 955 Rev. A Series adhesives are available in various packages such as syringes, cartridges, bottles, and pails. They may be dispensed with a variety of automatic bench-top syringe applicators or other equipment as required. Direct questions relating to dispensing and curing systems for specific applications to the Dymax Tech Center at 860-482-1010.

Wear impervious gloves and/or barrier cream. Repeated or continuous skin contact with liquid adhesive will cause irritation and should be avoided. Do not wear absorbent gloves. Remove adhesive from skin with soap and water. Never use solvents to remove adhesive from skin or eyes.

### **STORAGE AND SHELF LIFE**

Store material in a cool, dark place when not in use. Do not expose to UV light or sunlight. Material may polymerize upon prolonged exposure to ambient light. Replace lid immediately after use. Product has a one-year shelf life when stored below 90°F in the original, unopened container.

### **CAUTION**

For industrial use only. Avoid breathing vapors. Avoid contact with eyes and clothing. In case of contact, immediately flush with water for at least 15 minutes; get medical attention. Wash clothing before reuse. Keep out of reach of children. Do not take internally. If swallowed, induce vomiting at once and call a physician. Repeated or continuous skin contact with liquid adhesive will cause irritation and should be avoided. For specific information, refer to the product Material Safety Data Sheet.

© 2004 Dymax Corporation

The data contained in this bulletin is of a general nature and is based on laboratory test conditions. Dymax does not warrant the data contained in this bulletin. Any warranty applicable to the product, its application and use is strictly limited to that contained in Dymax's standard Conditions of Sale. Dymax does not assume responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this bulletin shall act as a representation that the product use or application will not infringe a patent owned by someone other than Dymax or act as a grant of a license under any Dymax Corporation Patent. Dymax recommends that each user adequately test its proposed use and application before actual repetitive use, using the data contained in this bulletin as a general guide.

**DYMAX Corporation** - 318 Industrial Lane - Torrington, CT 06790 - Phone: 860-482-1010 - Fax: 860-496-0608  
E-mail: [info@dymax.com](mailto:info@dymax.com) - [www.dymax.com](http://www.dymax.com)

**DYMAX Europe GmbH** - Trakehner Strasse 3 - D-60487 Frankfurt am Main - Germany - Phone: (49) 69-7165-3568  
Fax: (49) 69-7185-3830 - E-mail: [dymaxinfo@dymax.de](mailto:dymaxinfo@dymax.de)

DYMAX®, Light-Weld®, Light-Welder®, Multi-Cure®, Ultra Light-Weld®, MEDI-CURE® and MD® are trademarks of DYMAX Corporation

